


FIRST FLOOR

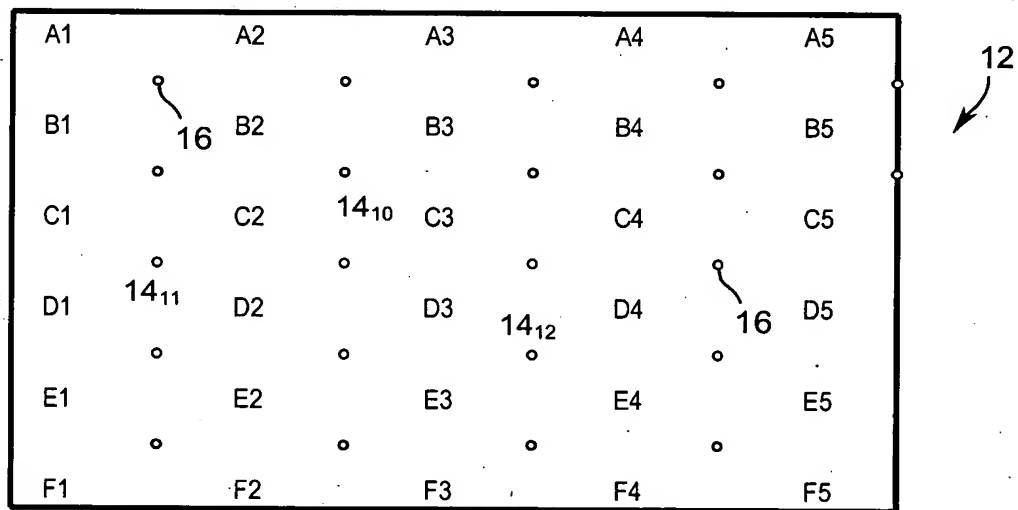

SECOND FLOOR

FIG. 1

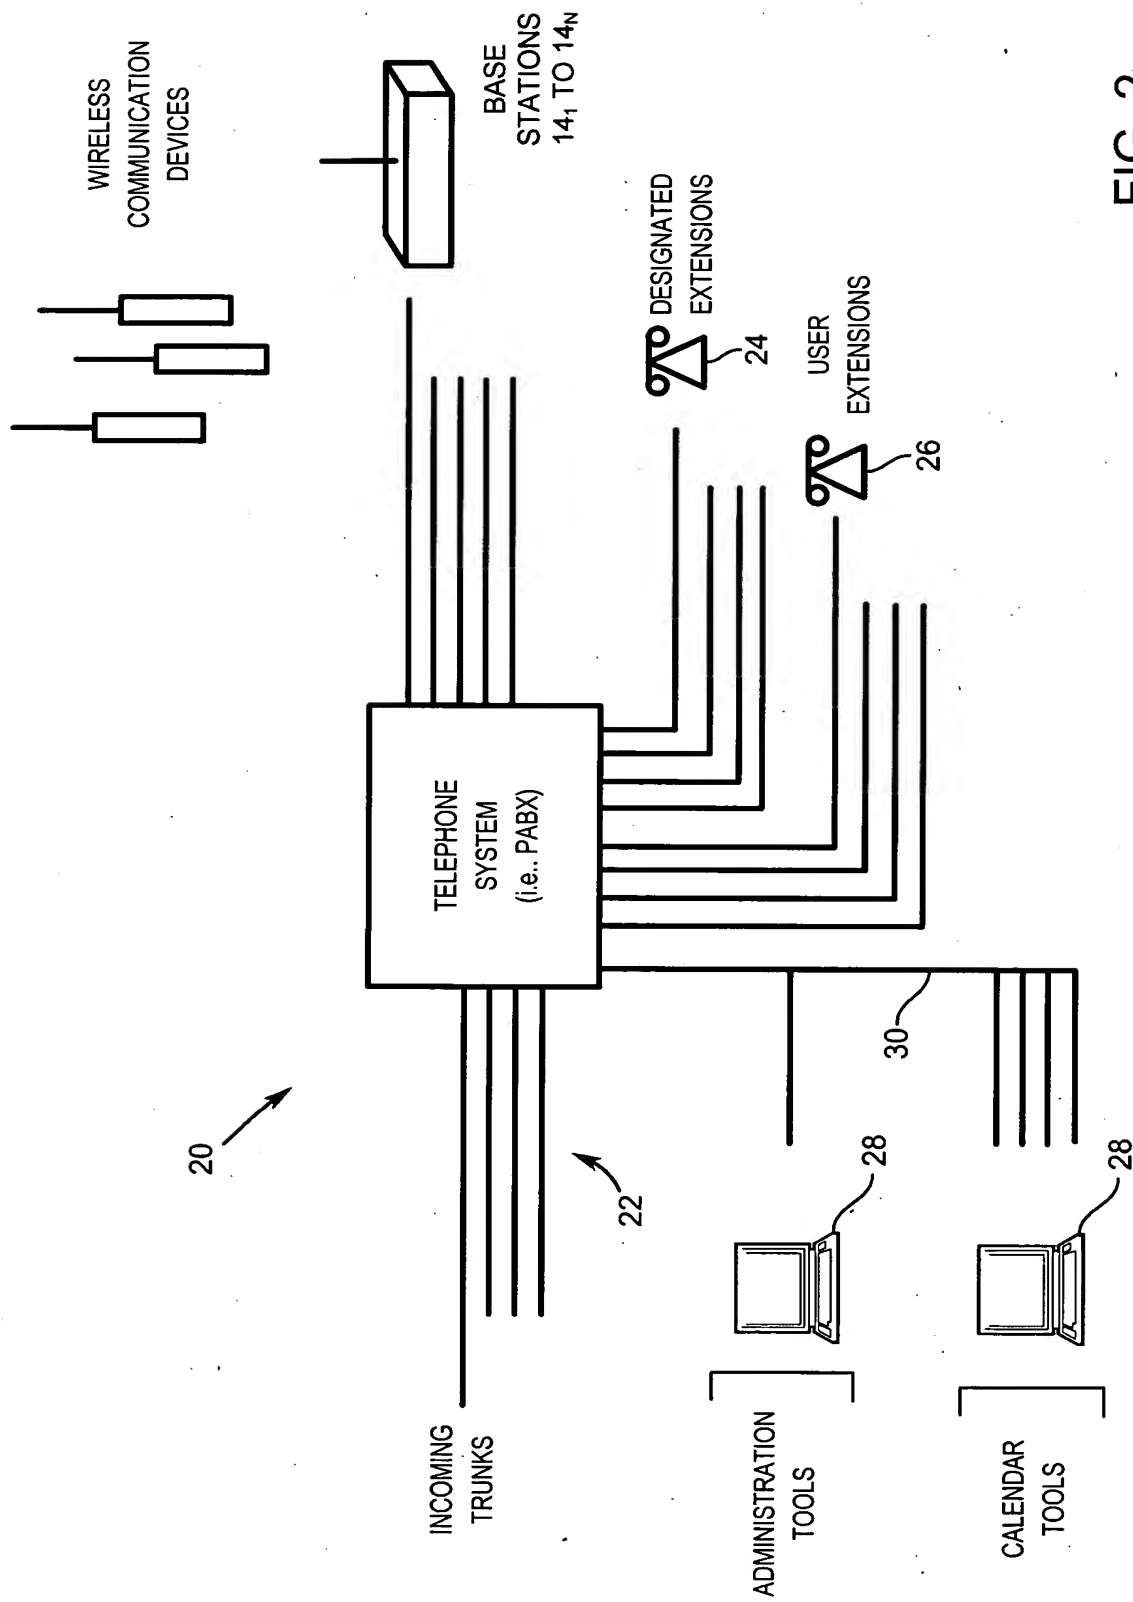


FIG. 2

FOR EACH FLOOR

A MATRIX OF NORMALIZED SIGNAL STRENGTH IS MANAGED

FOR EACH GRID LOCATION

FOR EACH BASE STATION

GRID LOCATION	BASE STATION							
	14 ₁	14 ₂	14 ₃	14 ₄	14 ₅	14 ₆	14 ₇	14 ₈
A1	0	.1	.15	.5	.2	.1	0	0
A2	0	0	.2	.4	.3	.15	0	0
A3	0	0	0	.2	.6	.3	.1	0
.								
.								
.								
A8								
B1								
.								
.								
.								
Ect.								

FIG. 3

<u>REDIREC- TION</u>	<u>PRIMARY SECRETARY</u>	<u>SECONDARY SECRETARY</u>	<u>IMPORTANCE THRESHOLD</u>	<u>CALLER DIST.</u>	<u>DESIGNATED EXTENSION</u>	<u>COMMENT</u>
1	6400	6700	1	A TO E	4032	MEETING ROOM
2	BLANK	BLANK	2	F TO P	BLANK	WASH- ROOM
3	6700	BLANK	3	Q TO W	BLANK	OFFICE
	ect.				ect.	

FIG. 4

FOR EACH FLOOR

FOR EACH GRID LOCATION

ZONE # OR Ø

i.e. ⁽¹⁾

A1 1	B1 1	C1 Ø
A2 1	B2 1	C2 Ø
A3 Ø	B3 Ø	C3 Ø
A4 Ø	B4 Ø	C4 Ø
A5 Ø	B5 Ø	C5 Ø
A6 Ø	B6 Ø	C6 Ø
A7 Ø	B7 Ø	C7 Ø
A8 Ø	B8 Ø	C8 Ø

ect.

FIG. 5

IMPORTANCE THRESHOLDS

IMPORTANCE #	CALLER CRITERIA	CALLER CRITERIA (CUS)
1	EXTERNAL	1

FIG. 6

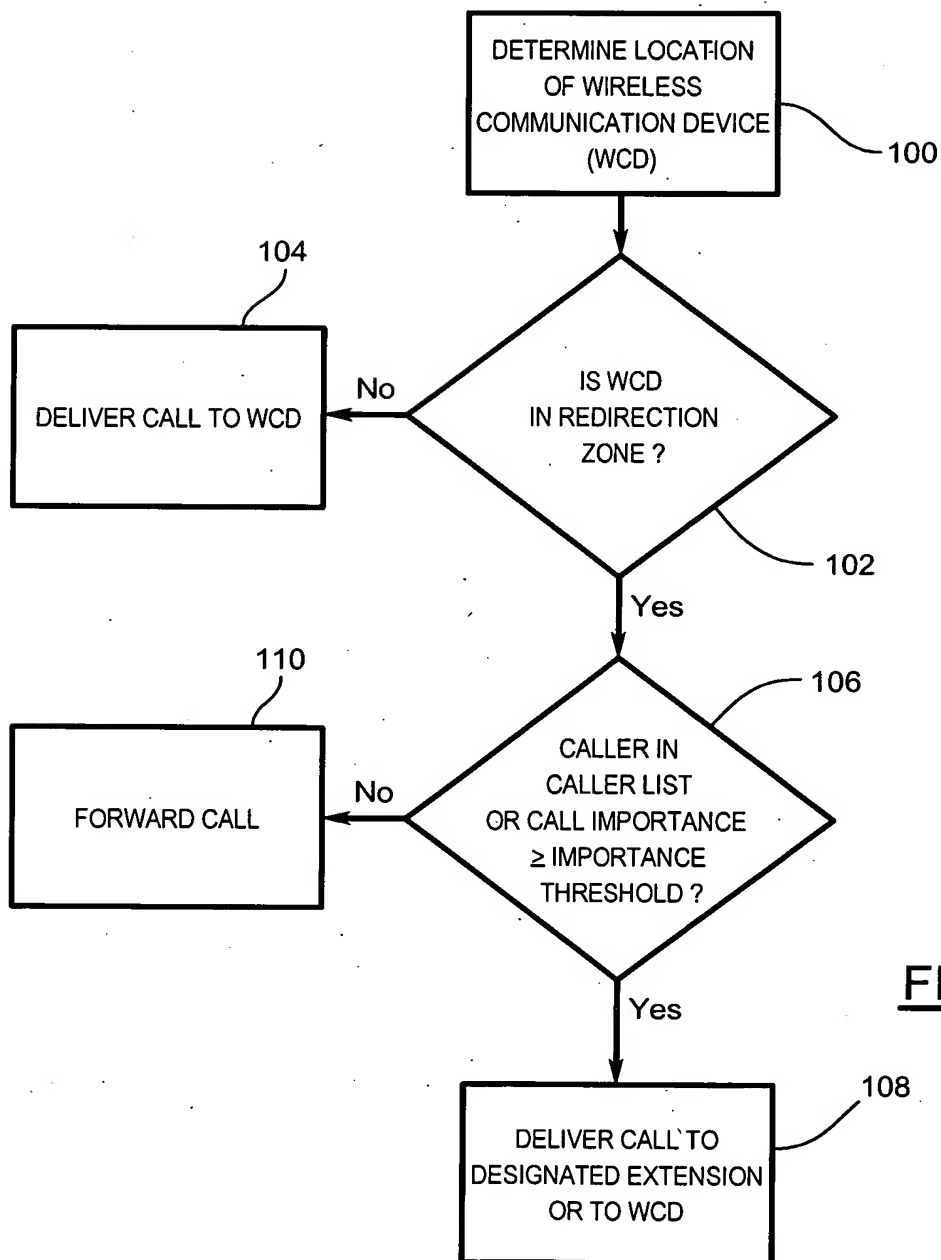


FIG. 7